IS-1000R3NP

1000W PS2 Mini Redundant Power Supply

Features

- Universal Input, Active PFC
- Efficiency: 74% at Full Load
- Industrial Japanese Components 40 deg.C temperature
- Automatic Fan Thermal Control
- Backward Compatibility, -5V Available
- Industrial DIN-Connector for Reliability
- Remote Sense on +5V & +3.3V
- Power Failure Alarm & Signals
- OPP (Over Power Protection)
- OVP (Over Voltage Protection)
- OCP (Over Current Protection)
- SCP (Short Circuit Protection)
- MTBF > 100,000 Hours

Specifications

Model Number	Efficiency
IS-1000R3NP	74%
RoHS Compliance	**Connector Type**
YES	Main Connector :: 24 pin/ 4pin 12V :: 1/ 8pin EPS 12V :: 1/ Molex :: 8 SATA :: 4/ Floppy :: 2
Output Wattage	**Dimensions (WxHxD)**
1000	Width 5.91" (150.1 mm) Height 3.35" (85.1 mm) Depth 11.42" (290.1 mm)

Front View



Side View

Rear View

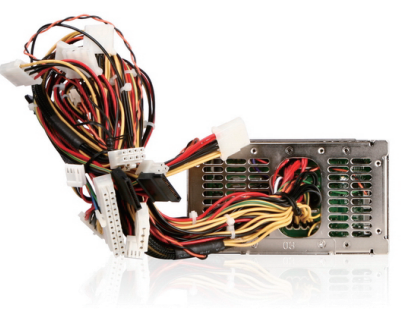

Dimensions

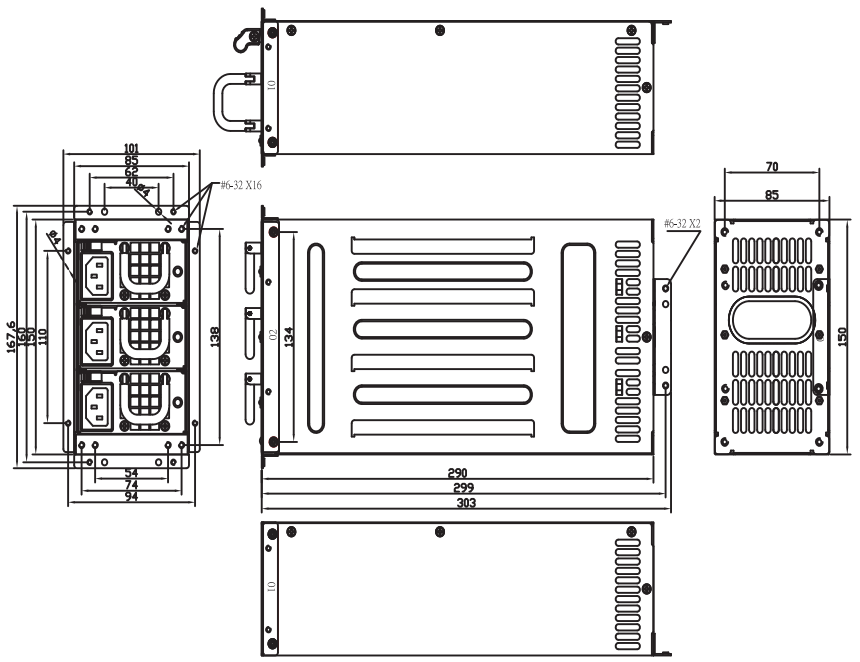

Output Rating

Output Voltage	+5V	+3.3V	+12V	-5V	-12V	+5VSB
Max. Load	55A	40A	80A	0.5A	0.8A	2A
Min. Load	1A	1A	2A	0A	0A	0.1A
Max. Combined	**320W**					
Total Output	**978W**			**2.5W**	**9.6W**	**10W**